

**A Web-based Database for the Mine Burial Program
and
Site Surveys of the Mine Burial/Coastal Processes Experiment Site at the
WHOI Coastal Observatory, Martha's Vineyard**

Larry Mayer
Center for Coastal and Ocean Mapping
University of New Hampshire
Durham, N.H. 03824
Phone: (603)862-2615 fax: (603) 862-0839 email: lmayer@cisunix.unh.edu

Award #N00014-00-1-0847 and N00014-02-1-0138
<http://www.mbp.unh.edu/>

LONG-TERM GOALS:

The long-term goal of the Mine Burial Program is to develop a better understanding of the coastal processes driving mine burial in shallow water coastal environments.

OBJECTIVES:

The scientific objectives of the Mine Burial Program are to develop specific models for mine burial driven by coastal processes, to carry out both laboratory and field programs designed to test these models, and to develop probability statements with respect to the likelihood of mine burial. Two field areas have been identified for this project, one off St. Petersburg, Florida and the second off Martha's Vineyard, Mass. The University of New Hampshire is providing support for these objectives through two separate efforts: 1- the development of a web-based database for the Mine Burial Program and; 2- the collection, processing and analysis of high-resolution multibeam sonar data at the Martha's Vineyard field area. In conjunction with investigators from the University of Texas (John Goff), the University of Hawaii (Roy Wilkins), the USGS (Bill Schwab), and Woods Hole Oceanographic Institution (Peter Traykovski), we will use both the sonar data and the database to investigate the statistical properties of sedimentological and morphological variability, as well as track changes in bedform morphology and other time dependent seabed processes.

APPROACH:

Detailed seafloor mapping and characterization will be critical to the success of both the experimental and theoretical components to the mine burial program. While the sedimentary properties of any survey area must be described before we can understand mine burial processes, we must also understand the variability and areal distribution of sediments in the target location – necessary to understand the natural variability of the burial process. We cannot rely on a few samples in the target area, but rather we need to map and characterize the area as completely, and with as much detail, as possible. Furthermore, we also cannot rely on a single map. We expect the seafloor to change over time – from season to season, and as bedforms migrate along the seafloor (one of the important burial mechanisms). We need the capability to map both the morphology and sedimentary properties of the target area as frequently and inexpensively as possible.

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 30 SEP 2003		2. REPORT TYPE		3. DATES COVERED 00-00-2003 to 00-00-2003	
4. TITLE AND SUBTITLE A Web-based Database for the Mine Burial Program and Site Surveys of the Mine Burial/Coastal Processes Experiment Site at the WHOI Coastal Observatory, Martha's Vineyard			5a. CONTRACT NUMBER		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) University of New Hampshire,,Center for Coastal and Ocean Mapping,,Durham,,DH,03824			8. PERFORMING ORGANIZATION REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)			10. SPONSOR/MONITOR'S ACRONYM(S)		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT The scientific objectives of the Mine Burial Program are to develop specific models for mine burial driven by coastal processes, to carry out both laboratory and field programs designed to test these models, and to develop probability statements with respect to the likelihood of mine burial. Two field areas have been identified for this project, one off St. Petersburg, Florida and the second off Martha's Vineyard, Mass. The University of New Hampshire is providing support for these objectives through two separate efforts: 1- the development of a web-based database for the Mine Burial Program and; 2- the collection, processing and analysis of high-resolution multibeam sonar data at the Martha's Vineyard field area. In conjunction with investigators from the University of Texas (John Goff), the University of Hawaii (Roy Wilkins), the USGS (Bill Schwab), and Woods Hole Oceanographic Institution (Peter Traykovski), we will use both the sonar data and the database to investigate the statistical properties of sedimentological and morphological variability, as well as track changes in bedform morphology and other time dependent seabed processes					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 7	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

Our approach is to use multibeam sonar mapping to monitor the seafloor and its changes. Multibeam mapping is quick, relatively inexpensive, and maps can be generated in near real time. The detailed bathymetry provided by the latest technology is unparalleled and in addition, many the systems can produce georeferenced backscatter maps that may provide critical insight into the distribution of seafloor properties.

Another component of our effort is the “ground-truthing” of sidescan and multibeam backscatter data against the measured sedimentological and geotechnical properties of the seafloor. Other investigators are collecting sediment samples for physical and geotechnical properties (Goff), subbottom profiles (Wilkens and Schock) and super-high resolution pole mounted sector scanning sonar records (Traykovski). In support of these efforts, we have deployed our *in-situ* sound speed and attenuation probe (ISSAP – see GEOCLUTTER report) to make *in-situ* measurements of the near-surface sediment properties.

To conduct the detailed high-resolution multibeam surveys we have chosen a Reson 8125 multibeam sonar. With its dynamic focusing and 0.5 degree beamwidths, the 8125 has demonstrated the ability to achieve higher resolution and faster ping rates than any other multibeam sonar presently available. Very precise positioning is also critical to achieve the highest resolution possible and to enable meaningful repeat surveys. Thus we have also established an array of kinematic DGPS positioning receivers on Martha’s Vineyard and have had diver-deployed sonar reflectors emplaced in the survey area to act as fiducials for repeat surveys. Finally we have established and are maintaining the Mine Burial Web Site to act as a central repository for Mine Burial experiment data as well as a focal point for information exchange and analysis.

WORK COMPLETED:

The Woods Hole mine burial experiment covers water depths from 8-18 m, within a relatively confined area focused around an existing coastal observatory node – the Martha’s Vineyard Coastal Observatory (MVCO). The MVCO is located in 12 m of water and provides both power and hard-wired data telemetry back to shore.

In February 2001, the USGS, in conjunction with Peter Traykovski, collected DF1000 sidescan sonar and boomer data in a small (2 x 3.5 km) area centered around the MVCO site. Seven months later, the USGS conducted a regional bathymetric and sidescan sonar survey using a 134 kHz Submetrix interferometric sonar. These surveys provided a baseline within which to plan our detailed multibeam sonar survey. They also provide a baseline from which to understand regional sediment movements.

Between July 13th and 17th 2002, we conducted the Reson 8125 multibeam survey aboard the SAIC vessel *Ocean Explorer*. The survey consisted of a super high-resolution (4 m overlap) survey in a small area surrounding the MVCO node and mine burial sites, a slightly lower resolution survey (12 – 25 m overlap) in a box approximately 1 x 1 km surrounding the “target box” and a lower resolution survey (25 – 40 m line overlap) in a 3 x 5 km region surrounding the 1 x 1 km box. The vessel, the operators, and the Reson 8125 performed flawlessly through a range of sea states. We completed all of the work scheduled at precisely the coverage levels planned.

In order to obtain the resolution needed for repeat surveys and understand changes in the seafloor at levels of 10 cm or better, we established 3 kinematic GPS base stations on Martha’s Vineyard and 3 kinematic GPS receivers on the survey vessel. These systems worked well throughout the survey

period and allowed a horizontal positioning resolution of on the order of 5 cm. Vertical resolution is currently on the order of 10 cm though work is continuing to try to improve this.

Between 4 and 6 August, 2002, the UNH team also participated in a cruise aboard the *R/V Cape Henlopen*. This cruise was designed to collect core samples and *in-situ* measurements that will help us better understand the nature of the seafloor geology as well as better interpret the sidescan sonar and backscatter data already collected. On this cruise the UNH team deployed the *In situ* Sound Speed and Attenuation Probe (ISSAP –see GEOCLUTTER annual report for a description) making numerous measurements of *in situ* sound speed and attenuation in the mine burial area. In addition newly constructed resistivity probes were deployed on ISSAP adding *in situ* determinations of porosity to the suite of measurements made.

The first full suite of instrumented mines and mine-like objects will be deployed at the MVCO site during the first week in October 2003. Another high-resolution 8125 multibeam survey is scheduled for this time to capture the state of the seafloor and the mines at the time of initial deployment.

In order to facilitate the analysis of the multiple and disparate data sets collected at the Martha's Vineyard experimental site, we have compiled all available data sets (multibeam, sidescan, seismic, core, etc.) into both a standard GIS (ArcView) and into an interactive georeferenced 3-D environment (Figure 1). These compiled data sets have also been made available on the mine-burial website.

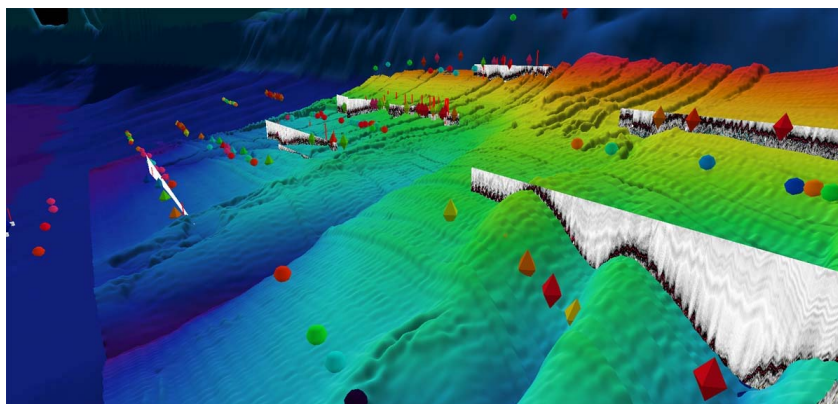


Figure 1. Scene from interactive 3-D view of MVCO database compilation. Plotted on bathymetry are core stations (red bars), velocity measurement sites (triangular polygons), grab samples (spheres) and seismic lines

RESULTS:

The Reson 8125 produced approximately 1 Gigabyte of data per hour, and the SAIC and UNH teams worked hard to process the data as quickly as possible. Gridded data sets at various levels of resolution (from cm's to meters) have been generated and made available to other ONR researchers directly and through the mine burial web site (see below). The bathymetric resolution we were able to achieve was beyond our expectations. The node site and all diver-emplaced reflectors were clearly identified and most amazingly, we are able to resolve fields of individual ripples that are on the order of 2-5 cm in height (Figure 2, left). Of particular relevance to the mine burial program was our ability to resolve an instrumented mine that had been deployed earlier by NRL (Figure 2, right). This mine is buried in a scour depression and is only a few centimeters proud above the base of the depression.

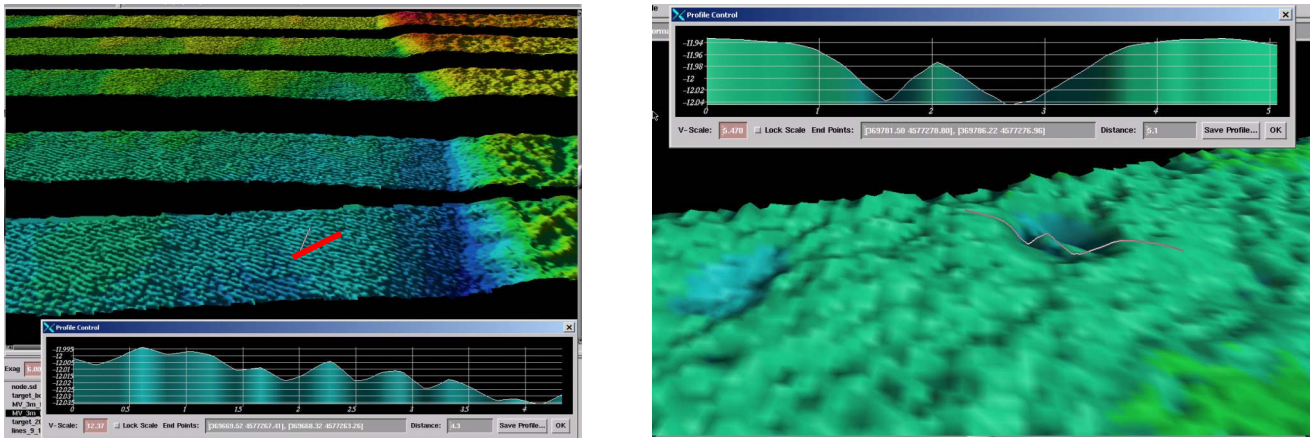


Figure 2 (left). Reson 8125 data from rippled scour depression at Martha's Vineyard mine burial site. System can clearly resolve individual ripples. Profile at bottom of figure represents area under red line in upper figure. Ripple heights are between 2 and 5 cm!) Fig 2 (right). 3-D image of NRL mine in scour pit at MVCO site. Profile above is cross-section over mine and across scour pit. Mine is sitting 5-6 cm proud above bottom of 10 – 12 cm deep scour pit.

Results from the deployment of the ISSAP were equally successful. During the three-day August cruise, 102 acoustic (sound speed and attenuation) and resistivity (porosity) stations were occupied representing more than 62,000 discrete measurements and more than 30 Gigabytes of data. At nine stations we were able to make measurements at two different frequencies (100 and 65 kHz) and at about half the stations continuous measurements were made as the probes entered the interface. Data quality is very high with measurement accuracy of $\pm 0.5 - 1$ m/sec for sound speed and ± 1 dB/m for attenuation. Even in this region of relatively limited sediment diversity, the sound varied from 1575 m/sec to 1806 m/sec and attenuation from 6.5 to 59.3 dB/m at 65 kHz. The greatest variation in both sound speed and attenuation appears to be associated with the finer-grained sediments that are less unimodal than the pure coarse-grained sediments (Fig 3) consistent with geoacoustic models for both sound speed and attenuation. Dual frequency measurements (at 65 and 100kHz) showed no measurable velocity dispersion. Future work will look at lower frequencies.

Finally the Mine Burial Website is up and available to the community at <http://www.mbp.unh.edu> (Figure 4). This site contains background information on the program, participant and meeting lists as well as all data that has been made available to us.

IMPACT/APPLICATIONS:

The multibeam survey has provided the morphological and sedimentological context for all investigators as well as demonstrated the ability to directly detect very small features on the seafloor. Most importantly, the multibeam data will provide us with an understanding of the distribution of very small-scale bedforms and topography (like the scour-pit) at a scale unobtainable by other means. This, in turn,

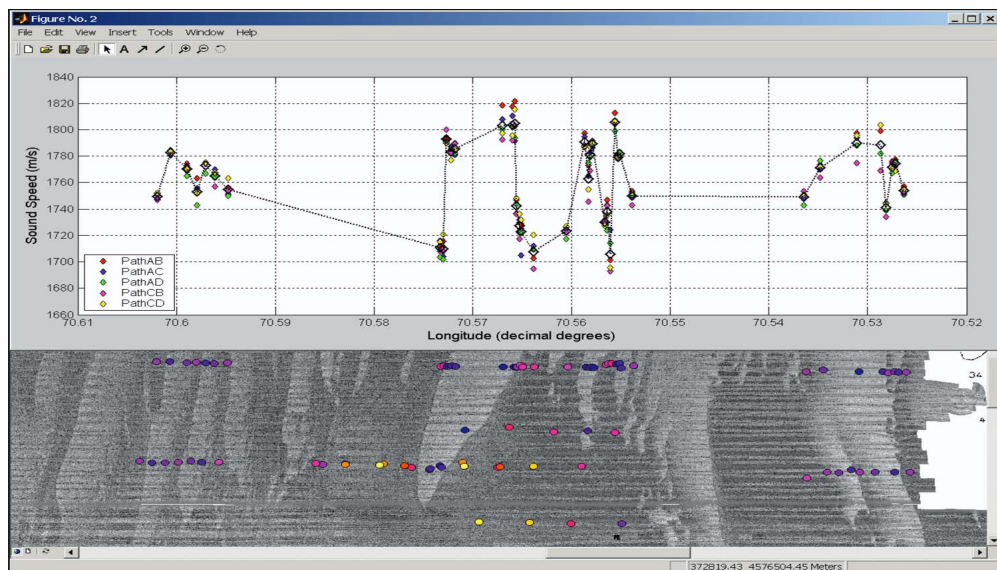


Figure 3. Plot of sound speed variability along east-west transects through MVCO mine burial site. Measurement locations are shown superimposed on acoustic backscatter plot in lower image. Highest variability is associated with eastern side of the ripple-scour depressions which, we believe have mixtures of fine and coarser grained sediments



Figure 4. Home page of Mine Burial Website. Site contains overview and background information about the project, reference lists and links as well as downloadable versions of posters, papers and all data made available.

will hopefully be of tremendous value to the modelers. With ground-truthing studies we hope to gain insight into the mechanisms of sediment transport and the potential for using backscatter to better understand seafloor property changes at the test site. The database will become the central repository for all project related work as well as providing the project team and others the tools necessary for efficient data exploration.

TRANSITIONS:

Lessons learned about mine detection with multibeam and sidescan sonar during this work and example data sets from the Martha's Vineyard experiment site have been incorporated into a training course for NAVO and U.S. Navy EOD specialists.

RELATED PROJECTS:

GEOCLUTTER, Uncertainty DRI, clear connections to upcoming RIPPLES DRI.

PUBLICATIONS:

- Goff, J.A., Mayer, L.A., Schwab, B., Traykovski, P., Wilkins, R., Jenkins, C., Kraft, B., Evans, R., Buynevich, I., Site Survey of the Martha's Vineyard Coastal Observatory: Backscatter, Grain Size and Temporal Evolution of Rippled Scour Depressions, , EOS Trans. AGU, 83 (47), Fall Meet. Suppl., Abstract OS61A-0181, 2002
- Kraft, B.J., Mayer, L A Simpkin, P., Goff J.A., , Schwab, B., Jenkins C., In Situ Measurement of Sediment Properties and Relationship to Backscatter: An Example From the ONR Mine Burial Program, Martha's Vineyard Coastal Observatory, EOS Trans. AGU, 83 (47), Fall Meet. Suppl., Abstract OS61A-0182, 2002
- Mayer, L A Raymond, R., Glang, G., Huff, L., Resolving the Ripples (and a Mine): High-Resolution Multibeam Survey of Martha's Vineyard ONR Mine Burial Program Field Area, EOS Trans. AGU, 83 (47), Fall Meet. Suppl., Abstract OS61A-0183, 2002
- Hou, T., Mayer, L.A., Kraft, B., Seafloor Characterization from Spatial Variation of Multibeam Backscatter vs. "Best Estimated" Grazing Angle, EOS Trans. AGU, 83 (47), Fall Meet. Suppl., Abstract S71C-0296, 2002